
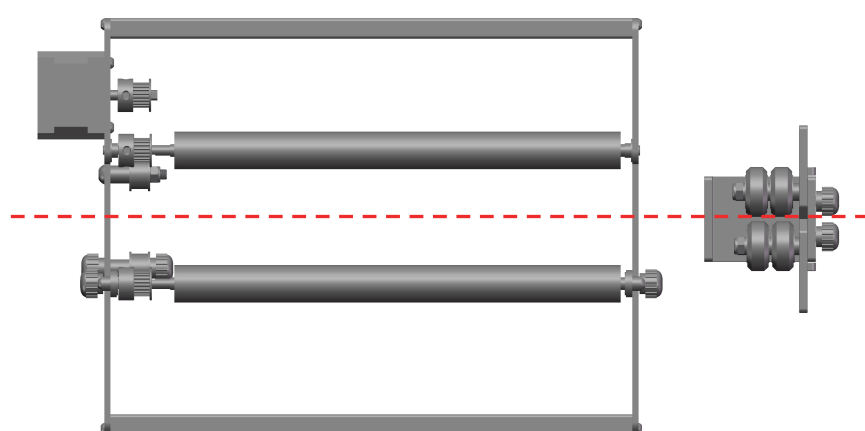


LONGER RAY5 Lifting Frame

Quick Start Guide V1.0

1. The lifting frame and the roller are used together, please read carefully the usage method of the roller before use.
 2. You can carve some longer items by adjusting the distance between the lifting frame and the roller, the width and height of the lifting frame.
- 1) Move the position of the lifting frame horizontally to adjust the distance from the roller.

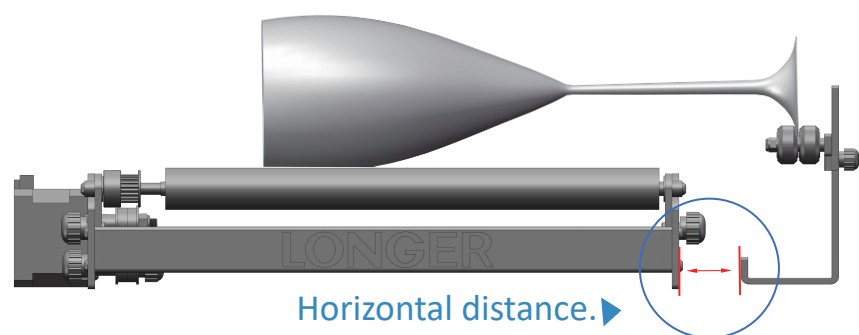


The two rollers of the drum are aligned with the horizontal center distance of the lifting frame.


- 2) Adjust the width of the lifting frame.




Remove the M5 locknut and take out the M5*40 screw.

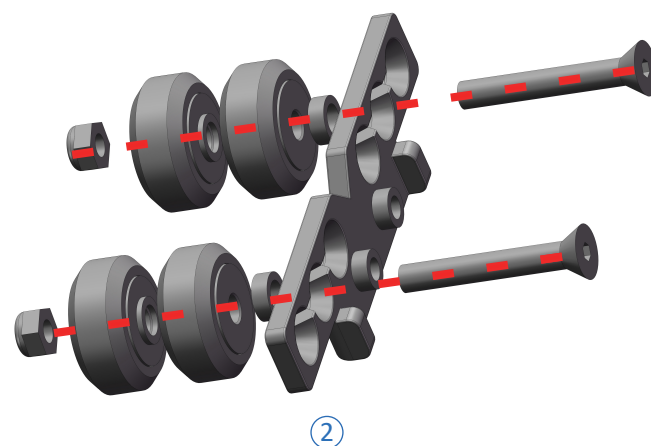

Move the M5*40 screw installation position to adjust the width of the lifting frame.

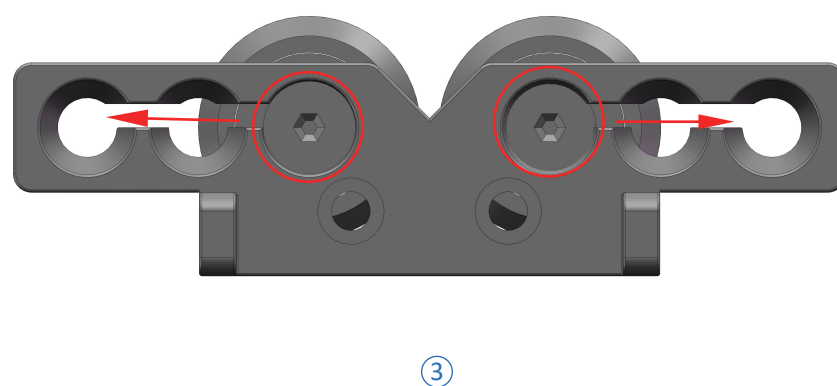

- 3) After loosening the M5x30 Hand Screw, the support frame can be slid up and down, according to the position of the engraved object, adjusted to the optimum height, and then tighten the Hand Screw.

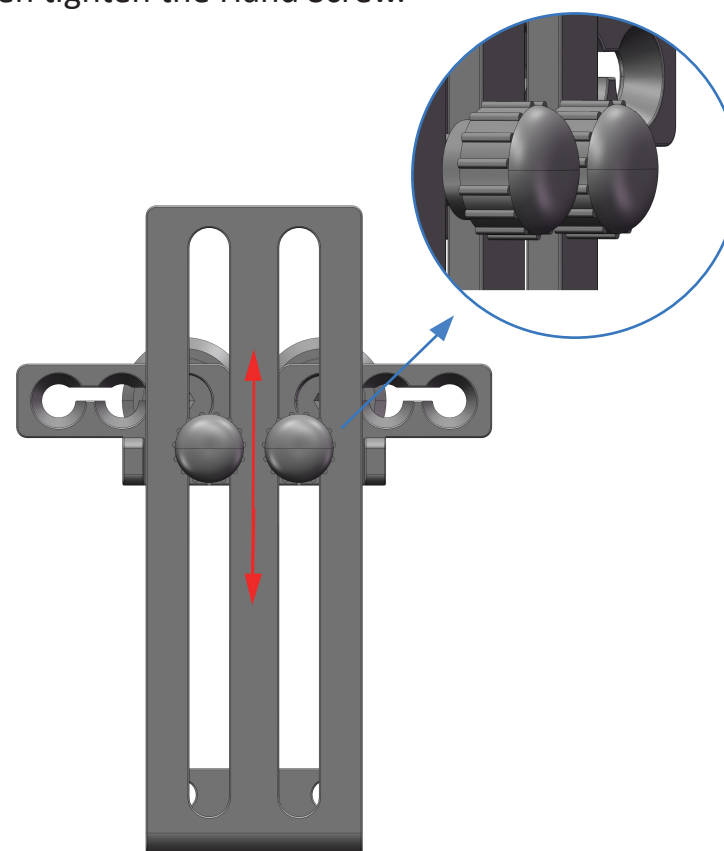

MORE INFORMATION ▼

Support Email : support@longer.net

Facebook ID: [longer3dprinter](#)

Facebook Group: [Longer Laser Engraver Official Group](#)

Youtube channel: [Longer 3D](#)